

DS8015-EX

入



定 宸 传 感 器



寸 入 入 入
低

65E B>5



□ , M7 [S 9S0 5
□ , 3 GD 入
0
.
, =
, 3
, H
, >86 ,
3
3
, H HUU , H> H
, 3
, H HUU H ,
H> H , 3
H H H H H H H

H> H , 3
入 , . =
入 ,
入 全



| | | |
|---|---|---|
| 入 | | |
| E | S | |
| E | T | |
| E | S | |
| E | T | |
| E | S | |
| E | T | 低 |
| E | | |



□ ,
H 65 H 65 , H 65
□ ,
G H 35 65
,
G_o H . 3 B_o + I
5 4 3
5_o + μ8 μ8 μ8
>_o



□ 3 ,
H 35
H 35
□ ,
, 7 5 75
□ ,

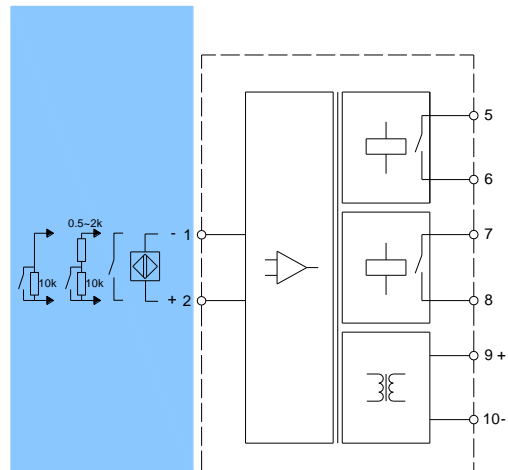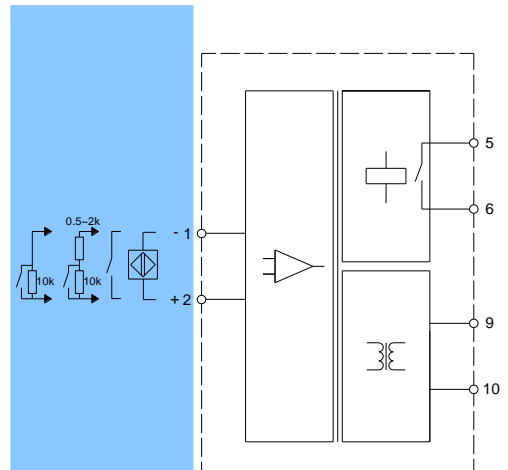


□ , I



+

75

低

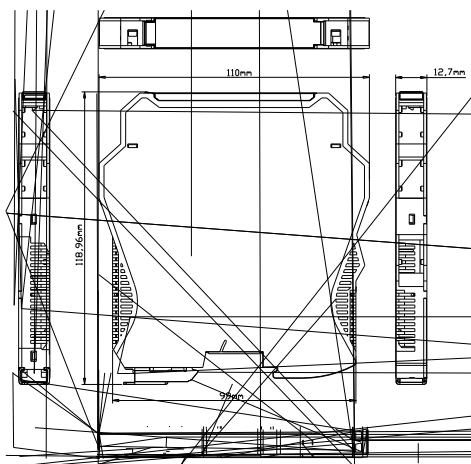

全

具



BI D,

AGF,



□ 低 ,

-

□ 低 ,

D + D

□ 低 ,

]BS]BS

□ ,

-



具

